
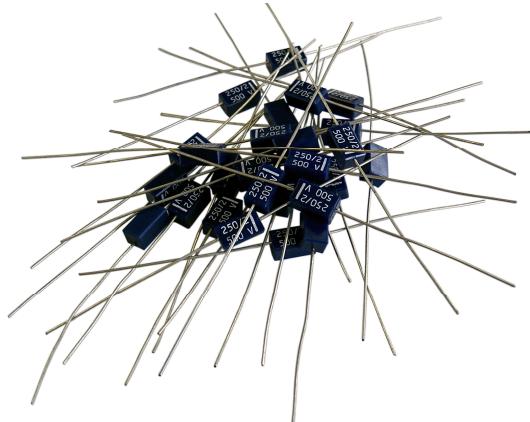


AG210

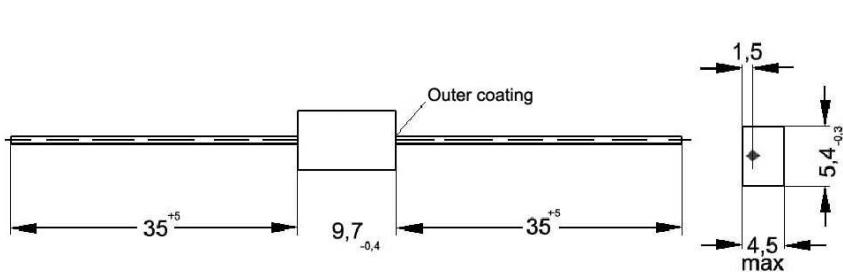

BMC mica capacitors of the type AG210 are in accordance to the type CM20 of the American MIL-C-5A specification. They are ideally suited for the higher requirements of the commercial technology.

Capacitance range: 10 – 360pF / 500V d.c.
10 – 510pF / 300V d.c.

Capacitance tolerance: > 10 – 20pF $\pm 1\text{pF}$, $\pm 10\%$
 > 20 – 50pF $\pm 1\text{pF}$, $\pm 5\%$, $\pm 10\%$
 > 50 – 100pF $\pm 1\text{pF}$, $\pm 2\%$, $\pm 5\%$, $\pm 10\%$
 > 100 – 510pF $\pm 0,5\%$, $\pm 1\%$, $\pm 2\%$, $\pm 5\%$, $\pm 10\%$

Rated voltage: 300V d.c. / 500V d.c. (alternatively)

Temperature range: -55°C to +100°C

Lead style: tinned copper wire 0,6 mm Ø

Marking of the outer coating:

The outer coating is respectively in the direction of the drop-tips on the backside of the capacitor. Colour coding for military purposes.

Order information:

